

LHF 东莞市连海电子有限公司

DONG GUAN LIAN HAI ELECTRONICS CO.LTD






产品编号

A2008H-NP

产品名称

YH 2.0 HSG

MATERIAL: NYION 66 UL94V-0

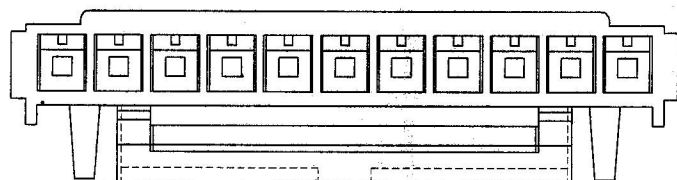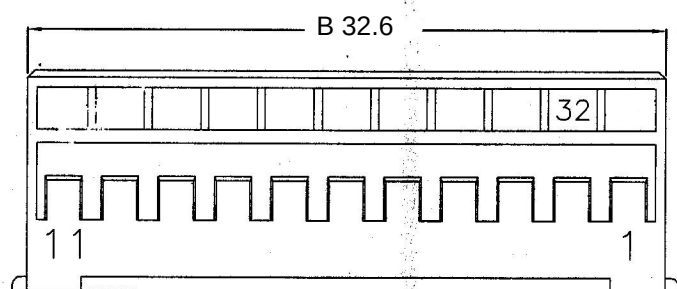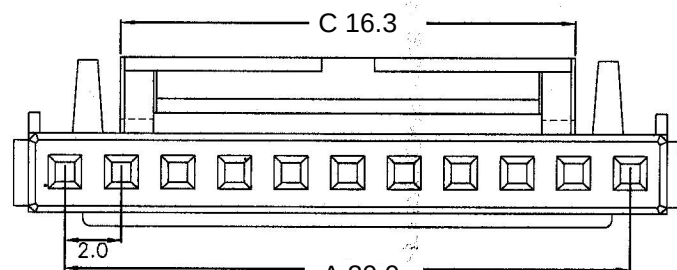




A2008H-2P

Dimensional & Ordering Information:


Circuits	Part No	Dimension(mm)		
		A	B	C
2	A2008H-2P	2.0	4.6	2.3
3	A2008H-3P	4.0	6.6	2.3
4	A2008H-4P	6.0	8.6	4.3
5	A2008H-5P	8.0	10.6	4.3
6	A2008H-6P	10.0	12.6	8.3
7	A2008H-7P	12.0	14.6	10.3
8	A2008H-8P	14.0	16.6	12.3
9	A2008H-9P	16.0	18.6	12.3
10	A2008H-10P	18.0	20.6	12.3
11	A2008H-11P	20.0	22.6	16.3
12	A2008H-12P	22.0	24.6	16.3
13	A2008H-13P	24.0	26.6	16.3
14	A2008H-14P	26.0	28.6	16.3
15	A2008H-15P	28.0	30.6	16.3
16	A2008H-16P	30.0	32.6	16.3

Poles	2~16 Poles
Pitch between poles	2.0mm
Rated Voltage	125V AC,DC
Rated current	2A
Withstand Voltage	1000V AC/minute
Insulation Resistance	1,000M Ω /min
Temperaure Range	-25~85°C
Applicable Wire	AWG#22~#30


REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ± 0.08		苏炯良	徐容灼	徐容灼
B			** ± 0.15				
C			* ± 0.25				

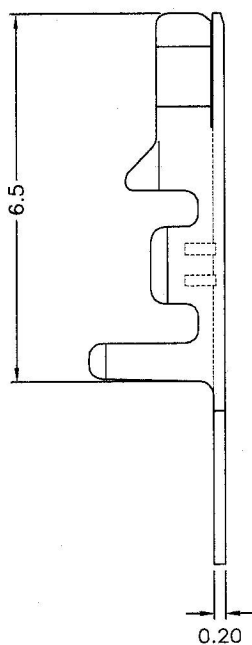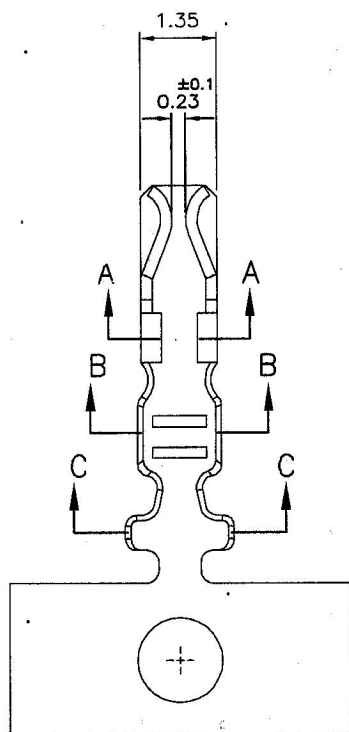

Section A-A



Section B-B





Section C-C

Specifications & Ordering Information:

Part No	Wire Range	Material	Finish	Qty/reel
A2008T	AWG#24~#30	Phosphor bronze	Tin-Plated	10,000 PCS

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ± 0.08		苏炯良	徐容灼	徐容灼
B			** ± 0.15				
			* ± 0.25				

MATERIAL: NYION 66 UL94V-0


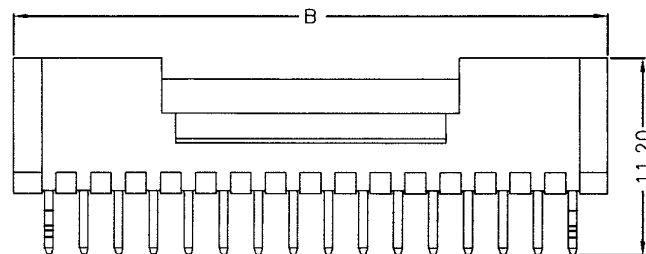
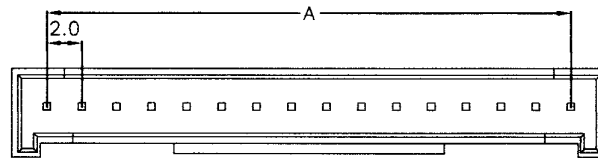


Circuits	Part No	Dimension (mm)	
	180°	A	B
2	A2008WV-2P	2.0	6.0
3	A2008WV-3P	4.0	8.0
4	A2008WV-4P	6.0	10.0
5	A2008WV-5P	8.0	12.0
6	A2008WV-6P	10.0	14.0
7	A2008WV-7P	12.0	16.0
8	A2008WV-8P	14.0	18.0
9	A2008WV-9P	16.0	20.0
10	A2008WV-10P	18.0	22.0
11	A2008WV-11P	20.0	24.0
12	A2008WV-12P	22.0	26.0
13	A2008WV-13P	24.0	28.0
14	A2008WV-14P	26.0	30.0
15	A2008WV-15P	28.0	32.0
16	A2008WV-16P	30.0	34.0

Poles	2~16 Poles
Pitch between poles	2.0mm
Rated Voltage	125V AC,DC
Rated current	1A
Withstand Voltage	1000V AC/minute
Insulation Resistance	1,000mΩ/min
Temperaure Range	-25~85℃

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ±0.08		陈 芳	王立国	
B			** ±0.15				
			* ±0.25				

MATERIAL: NYION 66 UL94V-0

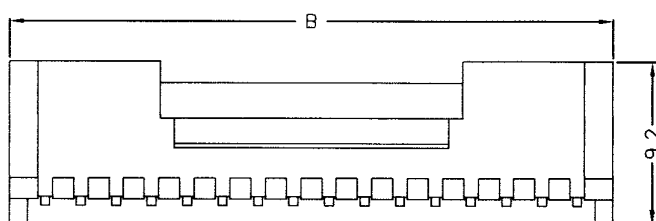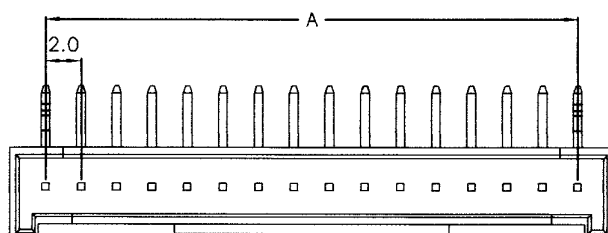

Circuits	Part No	Dimension (mm)	
	180°	A	B
2	A2008WR-2P	2.0	6.0
3	A2008WR-3P	4.0	8.0
4	A2008WR-4P	6.0	10.0
5	A2008WR-5P	8.0	12.0
6	A2008WR-6P	10.0	14.0
7	A2008WR-7P	12.0	16.0
8	A2008WR-8P	14.0	18.0
9	A2008WR-9P	16.0	20.0
10	A2008WR-10P	18.0	22.0
11	A2008WR-11P	20.0	24.0
12	A2008WR-12P	22.0	26.0
13	A2008WR-13P	24.0	28.0
14	A2008WR-14P	26.0	30.0
15	A2008WR-15P	28.0	32.0
16	A2008WR-16P	30.0	34.0

Poles	2~16 Poles
Pitch between poles	2.0mm
Rated Voltage	125V AC,DC
Rated current	1A
Withstand Voltage	1000V AC/minute
Insulation Resistance	1,000mΩ/min
Temperaure Range	-25~85°C

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ±0.08		陈芳	王立国	
B			** ±0.15				
			* ±0.25				