

LHF 东莞市连海电子有限公司

DONG GUAN LIAN HAI ELECTRONICS CO.LTD


产品编号

A2502H

产品名称

EH-2.5mm

MATERIAL: NYION 66 UL94V-0

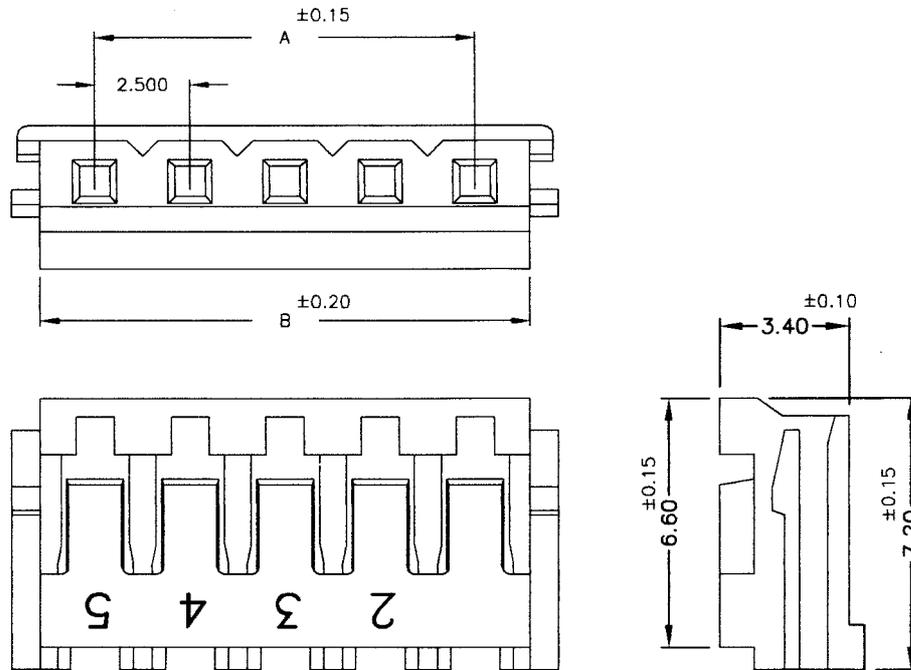


Dimensional & Ordering Information:

Circuits	Part No	Dimension (mm)		PCS/BAG
		A	B	
2	A2502H-2P	2.50	5.40	1,000
3	A2502H-3P	5.00	7.90	1,000
4	A2502H-4P	7.50	10.40	1,000
5	A2502H-5P	10.00	12.90	1,000
6	A2502H-6P	12.50	15.40	1,000
7	A2502H-7P	15.00	17.90	1,000
8	A2502H-8P	17.50	20.40	1,000
9	A2502H-9P	20.00	22.90	1,000
10	A2502H-10P	22.50	25.40	1,000
11	A2502H-11P	25.00	27.90	1,000
12	A2502H-12P	27.50	30.40	1,000
13	A2502H-13P	30.00	32.90	1,000
14	A2502H-14P	32.50	35.40	1,000
15	A2502H-15P	35.00	37.90	1,000
16	A2502H-16P	37.50	40.40	1,000

Poles	2~16 Poles
Pitch between poles	2.5mm
Rated Voltage	250V AC,DC
Rated current	2.5A
Withstand Voltage	800V AC/minute
Insulation Resistance	1,000mΩ/min
Temperaure Range	-25~65℃
Applicable Wire	AWG#22~#30

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ±0.08		周涛	周涛	
B			** ±0.15				
			* ±0.25				


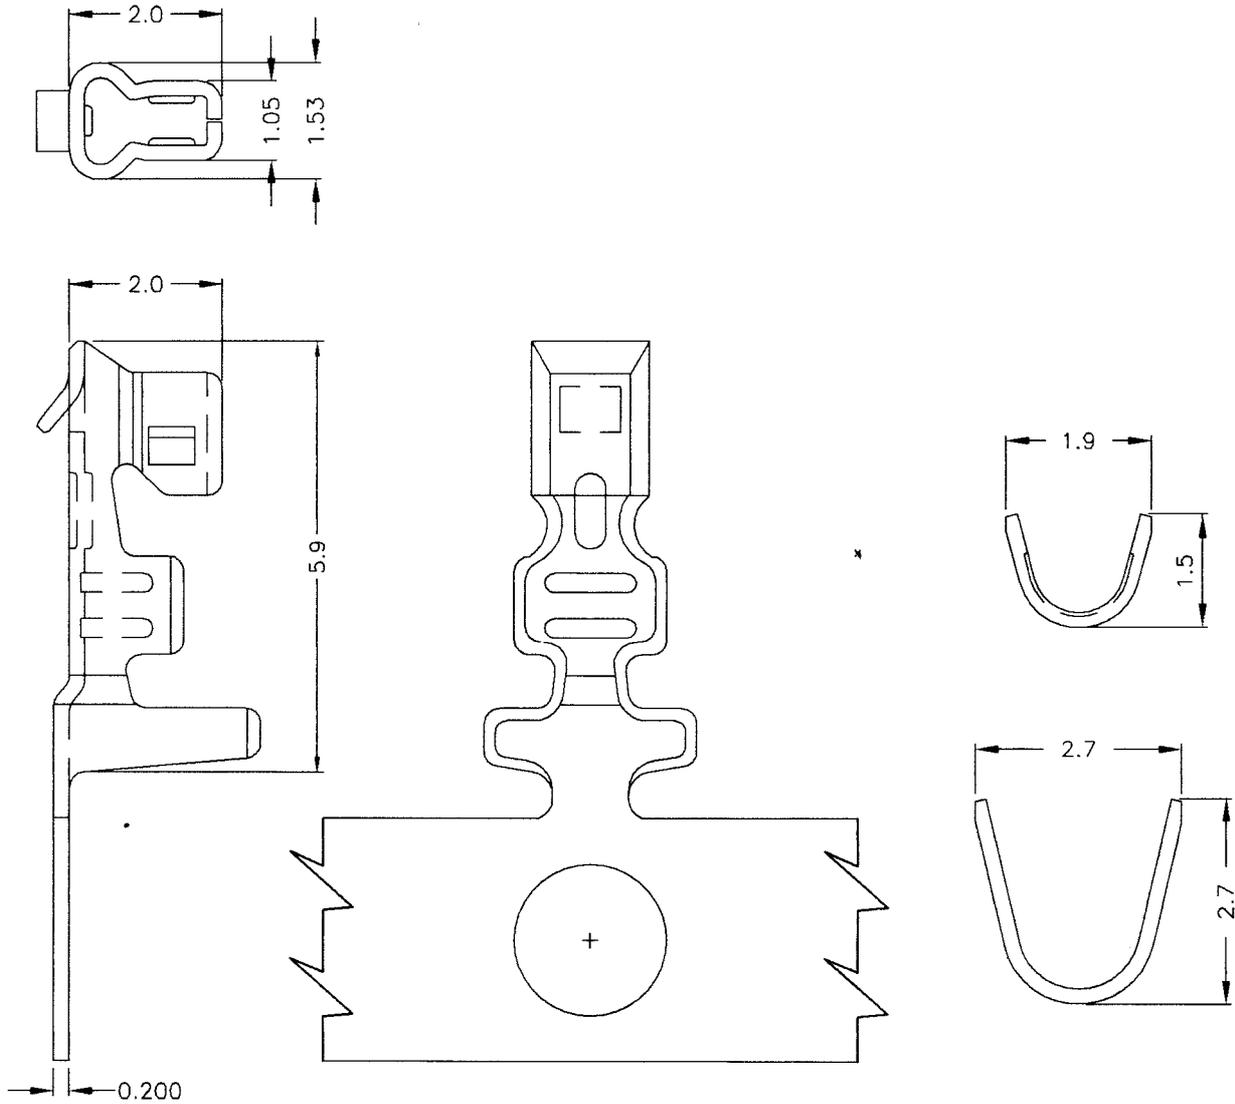


Specifications & Ordering Information:

Part No	Wire Range	Material	Finish	Qty/reel
A2502T	AWG#22~#30	Phosphor bronze	Tin-Plated	1,0000 PCS

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	.*** ±0.08		周涛	周涛	
B			.** ±0.15				
			.* ±0.25				

MATERIAL: NYION 66 UL94V-0

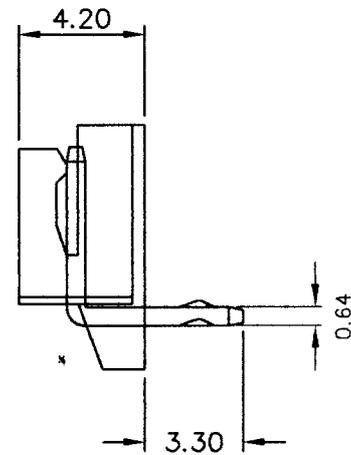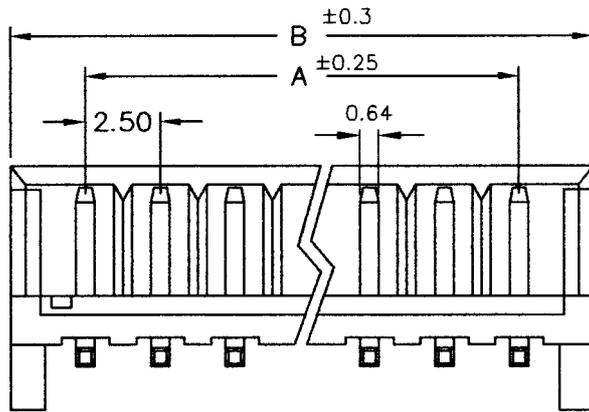

Dimensional & Ordering Information:

Circuits	Part No	Dimension (mm)		PCS/BAG
		A	B	
	90°			
2	A2502WR-2P	2.50	7.50	1,000
3	A2502WR-3P	5.00	10.00	1,000
4	A2502WR-4P	7.50	12.50	1,000
5	A2502WR-5P	10.00	15.00	1,000
6	A2502WR-6P	12.50	17.50	1,000
7	A2502WR-7P	15.00	20.00	1,000
8	A2502WR-8P	17.50	22.50	1,000
9	A2502WR-9P	20.00	25.00	1,000
10	A2502WR-10P	22.50	27.50	1,000
11	A2502WR-11P	25.00	30.00	1,000
12	A2502WR-12P	27.50	32.50	1,000
13	A2502WR-13P	30.00	35.00	1,000
14	A2502WR-14P	32.50	37.50	1,000
15	A2502WR-15P	35.00	40.00	1,000
16	A2502WR-16P	37.50	42.50	1,000

Poles	2~16 Poles
Pitch between poles	2.5mm
Rated Voltage	250V AC,DC
Rated current	2.5A
Withstand Voltage	800V AC/minute
Insulation Resistance	1,000m Ω /min
Temperaure Range	-25~65°C

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ± 0.08		周涛	周涛	
B			** ± 0.15				
			* ± 0.25				

LHF 东莞市连海电子有限公司

DONG GUAN LIAN HAI ELECTRONICS CO.LTD



产品编号

A2502WV

产品名称

EH-2.5mm

MATERIAL: NYION 66 UL94V-0

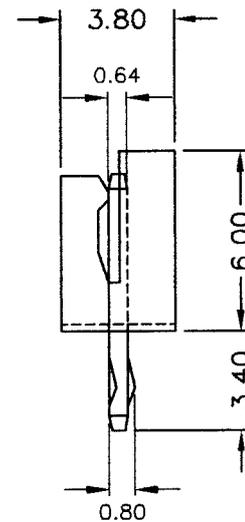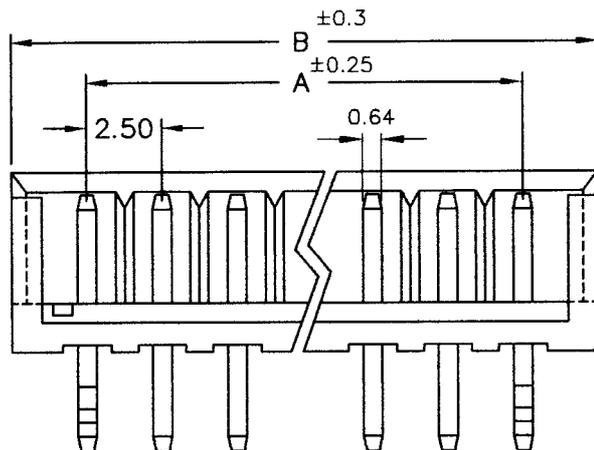

Dimensional & Ordering Information:

Circuits	Part No	Dimension (mm)		PCS/BAG
		A	B	
	180°			
2	A2502WV-2P	2.50	7.50	1,000
3	A2502WV-3P	5.00	10.00	1,000
4	A2502WV-4P	7.50	12.50	1,000
5	A2502WV-5P	10.00	15.00	1,000
6	A2502WV-6P	12.50	17.50	1,000
7	A2502WV-7P	15.00	20.00	1,000
8	A2502WV-8P	17.50	22.50	1,000
9	A2502WV-9P	20.00	25.00	1,000
10	A2502WV-10P	22.50	27.50	1,000
11	A2502WV-11P	25.00	30.00	1,000
12	A2502WV-12P	27.50	32.50	1,000
13	A2502WV-13P	30.00	35.00	1,000
14	A2502WV-14P	32.50	37.50	1,000
15	A2502WV-15P	35.00	40.00	1,000
16	A2502WV-16P	37.50	42.50	1,000

Poles	2~16 Poles
Pitch between poles	2.5mm
Rated Voltage	250V AC,DC
Rated current	2.5A
Withstand Voltage	800V AC/minute
Insulation Resistance	1,000mΩ/min
Temperature Range	-25~65°C

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ±0.08		周涛	周涛	
			** ±0.15				
B			* ±0.25				